

Relevant Airport Design Standards

Airport Dimensional and Separation Standards

(FAA Airport Design AC 150/5300-13A)

Appendix 7. Runway Design Standards Matrix

Table A7-1. Runway design standards matrix, A/B-I Small Aircraft

<i>Aircraft Approach Category (AAC) and Airplane Design Group (ADG):</i>		A/B - I Small Aircraft			
ITEM	DIM¹	VISIBILITY MINIMUMS			
		Visual	Not Lower than 1 mile	Not Lower than 3/4 mile	Lower than 3/4 mile
RUNWAY DESIGN					
Runway Length	A	<i>Refer to paragraphs 302 and 304</i>			
Runway Width	B	60 ft	60 ft	60 ft	75 ft
Shoulder Width		10 ft	10 ft	10 ft	10 ft
Blast Pad Width		80 ft	80 ft	80 ft	95 ft
Blast Pad Length		60 ft	60 ft	60 ft	60 ft
Crosswind Component		10.5 knots	10.5 knots	10.5 knots	10.5 knots
RUNWAY PROTECTION					
Runway Safety Area (RSA)					
Length beyond departure end ^{9, 10}	R	240 ft	240 ft	240 ft	600 ft
Length prior to threshold	P	240 ft	240 ft	240 ft	600 ft
Width	C	120 ft	120 ft	120 ft	300 ft
Runway Object Free Area (ROFA)					
Length beyond runway end	R	240 ft	240 ft	240 ft	600 ft
Length prior to threshold	P	240 ft	240 ft	240 ft	600 ft
Width	Q	250 ft	250 ft	250 ft	800 ft
Runway Obstacle Free Zone (ROFZ)					
Length		<i>Refer to paragraph 308</i>			
Width		<i>Refer to paragraph 308</i>			
Precision Obstacle Free Zone (POFZ)					
Length		N/A	N/A	N/A	N/A
Width		N/A	N/A	N/A	N/A
Approach Runway Protection Zone (RPZ)					
Length	L	1,000 ft	1,000 ft	1,700 ft	2,500 ft
Inner Width	U	250 ft	250 ft	1,000 ft	1,000 ft
Outer Width	V	450 ft	450 ft	1,510 ft	1,750 ft
Acres		8.035	8.035	48.978	79.000
Departure Runway Protection Zone (RPZ)					
Length	L	1,000 ft	1,000 ft	1,000 ft	1,000 ft
Inner Width	U	250 ft	250 ft	250 ft	250 ft
Outer Width	V	450 ft	450 ft	450 ft	450 ft
Acres		8.035	8.035	8.035	8.035
RUNWAY SEPARATION					
<i>Runway centerline to:</i>					
Parallel runway centerline	H	<i>Refer to paragraph 316</i>			
Holding Position		125 ft	125 ft	125 ft	175 ft
Parallel taxiway/taxilane centerline ^{2, 4}	D	150 ft	150 ft	150 ft	200 ft
Aircraft parking area	G	125 ft	125 ft	125 ft	400 ft

Note:

- Values in the table are rounded to the nearest foot. 1 foot = 0.305 meters.



Airport Obstruction Standards

(CFR Part 77)

OBSTRUCTION IDENTIFICATION SURFACES FEDERAL AVIATION REGULATIONS PART 77

DIM	ITEM	DIMENSIONAL STANDARDS (FEET)					PRECISION INSTRUMENT RUNWAY PIR	
		VISUAL RUNWAY		NON - PRECISION INSTRUMENT RUNWAY		PRECISION INSTRUMENT APPROACH		
		A	B	A	B			
		A	B	A	C	D		
A	WIDTH OF PRIMARY SURFACE AND APPROACH SURFACE WIDTH AT INNER END	250	500	500	500	1,000	1,000	
B	RADIUS OF HORIZONTAL SURFACE	5,000	5,000	5,000	10,000	10,000	10,000	
		VISUAL APPROACH		NON - PRECISION INSTRUMENT APPROACH		PRECISION INSTRUMENT APPROACH		
		A	B	A	B			
C	APPROACH SURFACE WIDTH AT END	1,250	1,500	2,000	3,500	4,000	16,000	
D	APPROACH SURFACE LENGTH	5,000	5,000	5,000	10,000	10,000	*	
E	APPROACH SLOPE	20:1	20:1	20:1	34:1	34:1	*	

- A - UTILITY RUNWAYS
- B - RUNWAYS LARGER THAN UTILITY
- C - VISIBILITY MINIMUMS GREATER THAN 3/4 MILE
- D - VISIBILITY MINIMUMS AS LOW AS 3/4 MILE
- * - PRECISION INSTRUMENT APPROACH SLOPE IS 50:1 FOR INNER 10,000 FEET AND 40:1 FOR AN ADDITIONAL 40,000 FEET

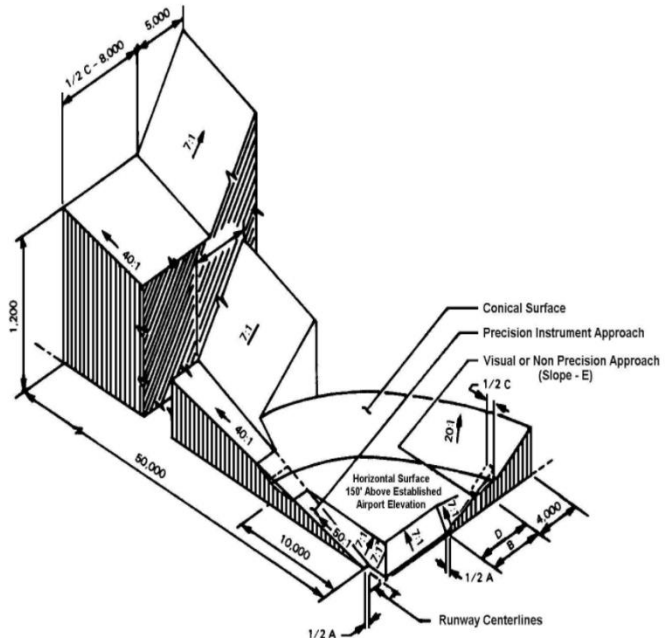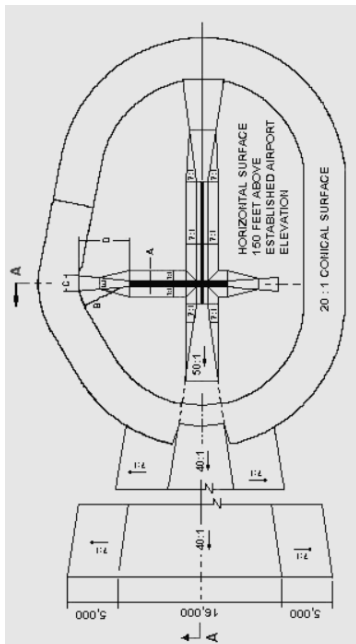


Runway Length Standards

(FAA AC 150/5323-4B)

Airplane Weight Category Maximum Certificated Takeoff Weight (MTOW)		Design Approach	Location of Design Guidelines				
12,500 pounds (5,670 kg) or less	Approach Speeds less than 30 knots	Family grouping of small airplanes	Chapter 2; Paragraph 203				
	Approach Speeds of at least 30 knots but less than 50 knots	Family grouping of small airplanes	Chapter 2; Paragraph 204				
	Approach Speeds of 50 knots or more	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">With Less than 10 Passengers</td> <td>Family grouping of small airplanes</td> <td>Chapter 2; Paragraph 205 Figure 2-1</td> </tr> <tr> <td>With 10 or more Passengers</td> <td>Family grouping of small airplanes</td> <td>Chapter 2; Paragraph 205 Figure 2-2</td> </tr> </table>	With Less than 10 Passengers	Family grouping of small airplanes	Chapter 2; Paragraph 205 Figure 2-1	With 10 or more Passengers	Family grouping of small airplanes
With Less than 10 Passengers	Family grouping of small airplanes	Chapter 2; Paragraph 205 Figure 2-1					
With 10 or more Passengers	Family grouping of small airplanes	Chapter 2; Paragraph 205 Figure 2-2					
Over 12,500 pounds (5,670 kg) but less than 60,000 pounds (27,200 kg)		Family grouping of large airplanes	Chapter 3; Figures 3-1 or 3-2 ¹ and Tables 3-1 or 3-2				
60,000 pounds (27,200 kg) or more or Regional Jets ²		Individual large airplane	Chapter 4; Airplane Manufacturer Websites (Appendix 1)				

Note¹: When the design airplane's APM shows a longer runway length than what is shown in figure 3-2, use the airplane manufacturer's APM. However, users of an APM are to adhere to the design guidelines found in Chapter 4.

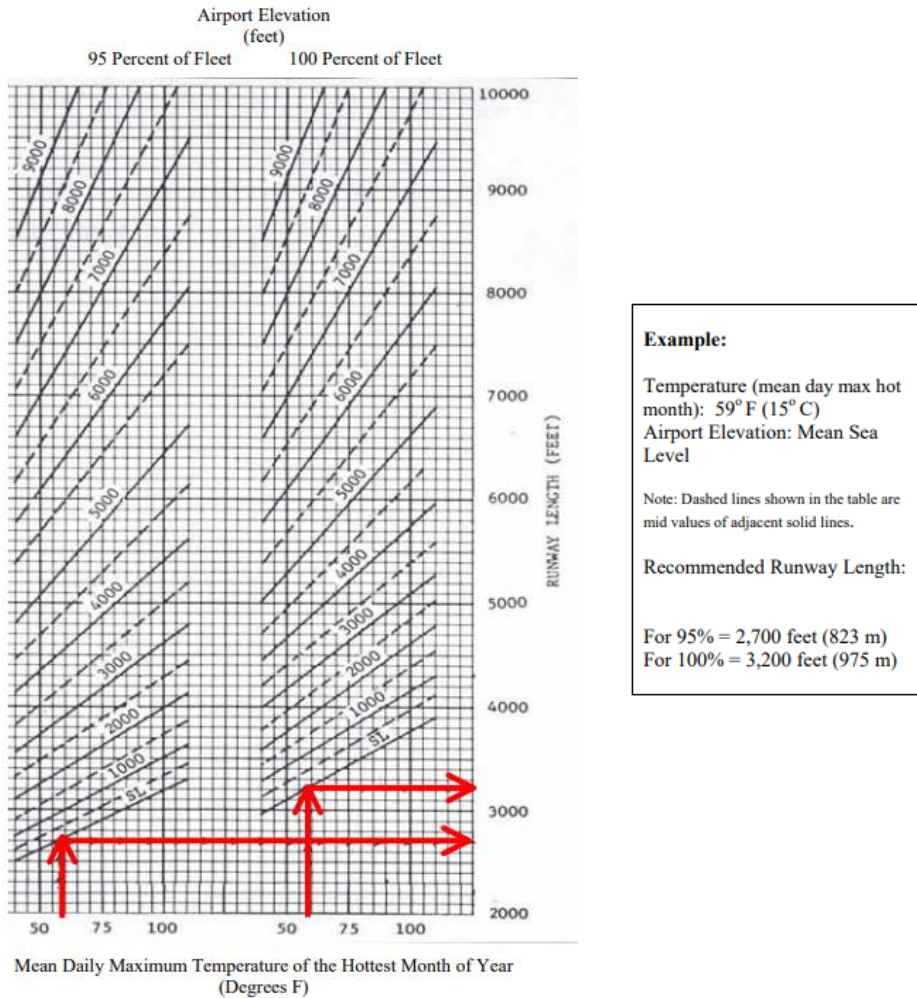

Previous Idaho state standards recommended runway lengths with following formula:

$$\text{Airport Elevation} \times 1/3 + 2000'$$

Impacts of Lowering Minimums of Instrument Approach

(Moving from not lower than 1 mile to not lower than ¾ mile)

Runway Type		DIMENSIONAL STANDARDS*					Slope/ OCS
		Feet (Meters)					
		A	B	C	D	E	
1	Approach end of runways expected to serve small airplanes with approach speeds less than 50 knots. (Visual runways only, day/night)	0 (0)	120 (37)	300 (91)	500 (152)	2,500 (762)	15:1
2	Approach end of runways expected to serve small airplanes with approach speeds of 50 knots or more. (Visual runways only, day/night)	0 (0)	250 (76)	700 (213)	2,250 (686)	2,750 (838)	20:1
3	Approach end of runways expected to serve large airplanes (Visual day/night); or instrument minimums ≥ 1 statute mile (1.6 km) (day only).	0 (0)	400 (122)	1000 (305)	1,500 (457)	8,500 (2591)	20:1
4	Approach end of runways expected to support instrument night operations, serving approach Category A and B aircraft only. ¹	200 (61)	400 (122)	3,800 (1158)	10,000 ² (3048)	0 (0)	20:1
5	Approach end of runways expected to support instrument night operations serving greater than approach Category B aircraft. ¹	200 (61)	800 (244)	3,800 (1158)	10,000 ² (3048)	0 (0)	20:1
6	Approach end of runways expected to accommodate instrument approaches having visibility minimums ≥ 3/4 but <1 statute mile (≥ 1.2 km but < 1.6 km), day or night.	200 (61)	800 (244)	3,800 (1158)	10,000 ² (3048)	0 (0)	20:1
7	Approach end of runways expected to accommodate instrument approaches having visibility minimums < 3/4 statute mile (1.2 km).	200 (61)	800 (244)	3,800 (1158)	10,000 ² (3048)	0 (0)	34:1
8 ^{3,5,6,7}	Approach end of runways expected to accommodate approaches with vertical guidance (Glide Path Qualification Surface [GQS]).	0 (0)	Runway width + 200 (61)	1520 (463)	10,000 ² (3048)	0 (0)	30:1
9	Departure runway ends for all instrument operations.	0 ⁴ (0)	See Figure 3-4.				40:1

Visibility minimums*	Changes in airport design standards
Visual to Not lower than 1-mile	No change in airport design standards.
Not lower than 1-mile to Not lower than 3/4-mile	Parallel Taxiway Increase in RPZ dimensions. Refer to interactive Table 3-5 . Increase in threshold siting standards. Refer to paragraph 303 .